

# Walking Floor Trailer;

Model: WFT

Make: **POLSKI**



## Specification; Dimensions

Length - inside 13,508mm outside 13,600mm

Width - outside 2,550mm

Height - outside 4,000mm to 4,600mm

Fifth wheel height - outside 1,250mm

## Axles & Suspension

Axles & Suspension, 3 x SAF Intradisc Plus/BPW Drum

All axles on pneumatic suspension

Lift Axle

## Pressures

Pressures on axles - 3 x 9,000kg Manufactured design

3 x 8,000kg UK design

## Wheels/Tyres

Tyres 6 x 385/55 R22,5 Continental

## Chassis Construction

Chassis made from high quality construction steel St52-3, as a welded construction, King pin = JOST 2"

Supporting legs as a crossmembers welded C profile with holes

## Body Construction

Aluminium crossmembers of body welded to the body with 45 degree chamfers, Aluminium body made of 25mm thickness of aluminium profiles 380mm width, 3mm thickness of inside wall, and 2mm thickness of outside wall, Front left hand side inspection door, Top crossmembers for holding demountable tarpaulin, made from aluminium box 40mm x 40mm, 4pcs/length

Fully welded internal body, Under the body on both sided - Riveted mesh protecting free space - slats (front Walking Floor)

## Rear Doors

Rear doors made of 25mm thick aluminium

Rear doors opened / to the body sides

Front catwalk with ladder and barriers 1,000mm high, made of aluminium

Rear door holders in open position - mounted under the body, Fully welded doors inside.

## Floor System

Moving floor system 6.1 **KEITH WALKING FLOOR** type 5.5mm, as standard

## Pneumatic Installation

Raise and lower valve HS mounted after rear axle on the left side

## Brake Installation

WABCO installation with EBS acc to REG 13.09 EKG ONZ

Axles with disc or drum brakes, Automatic pneumatic parking brake

EBS sensor on centre axle

## Electric Installation

Aspock system, Side marking lights acc to REG 48.00 EKG ONZ, Rubber angle lights on rear; Rear lamps protection - aluminium plate hanged to top, 2 x white LED lamps on top corners of the front wall, 2 x red LED lamps on top corners of rear; Reverse signal device

## Hydraulic Installation

Hydraulic installation piped on the front of the trailer

Inline filter on feed from tractor

## Paint

Steel construction blasted (acc to Sa 2.5 wg ISO-8501) painted using two pack system, 1x prime coat, 2 x top coat achieving minimum thickness 120mu.

Chassis painted in RAL code .....

Unseasoned aluminium body not painted - painted to customers specification as required.

## Tarpaulin

Tarpaulin rolled over body in any colour (operated from left side) bolted to the top profile, secured via 4 ratchet straps, Rubber blocks in line with the strap-bolted to the body x 3 vertically positioned.

## Equipment

Two gear supporting legs - JOST or HAACON with longer holding plate, operated from left side, Aluminium side guards acc to REG 73 EKG ONZ,


Aluminium ladder hidden under floor in the rear left side, Under wheel wedges x 2, Aluminium plate protecting lights (adjustable), Toolbox - mounted on left side,

Mudguards - Boydell Jacks PVC 90 degree in black

Rear mudguards with flaps - with pins from inside - Boydell Jacks

# Walking Floor Trailer;

Model; WFT

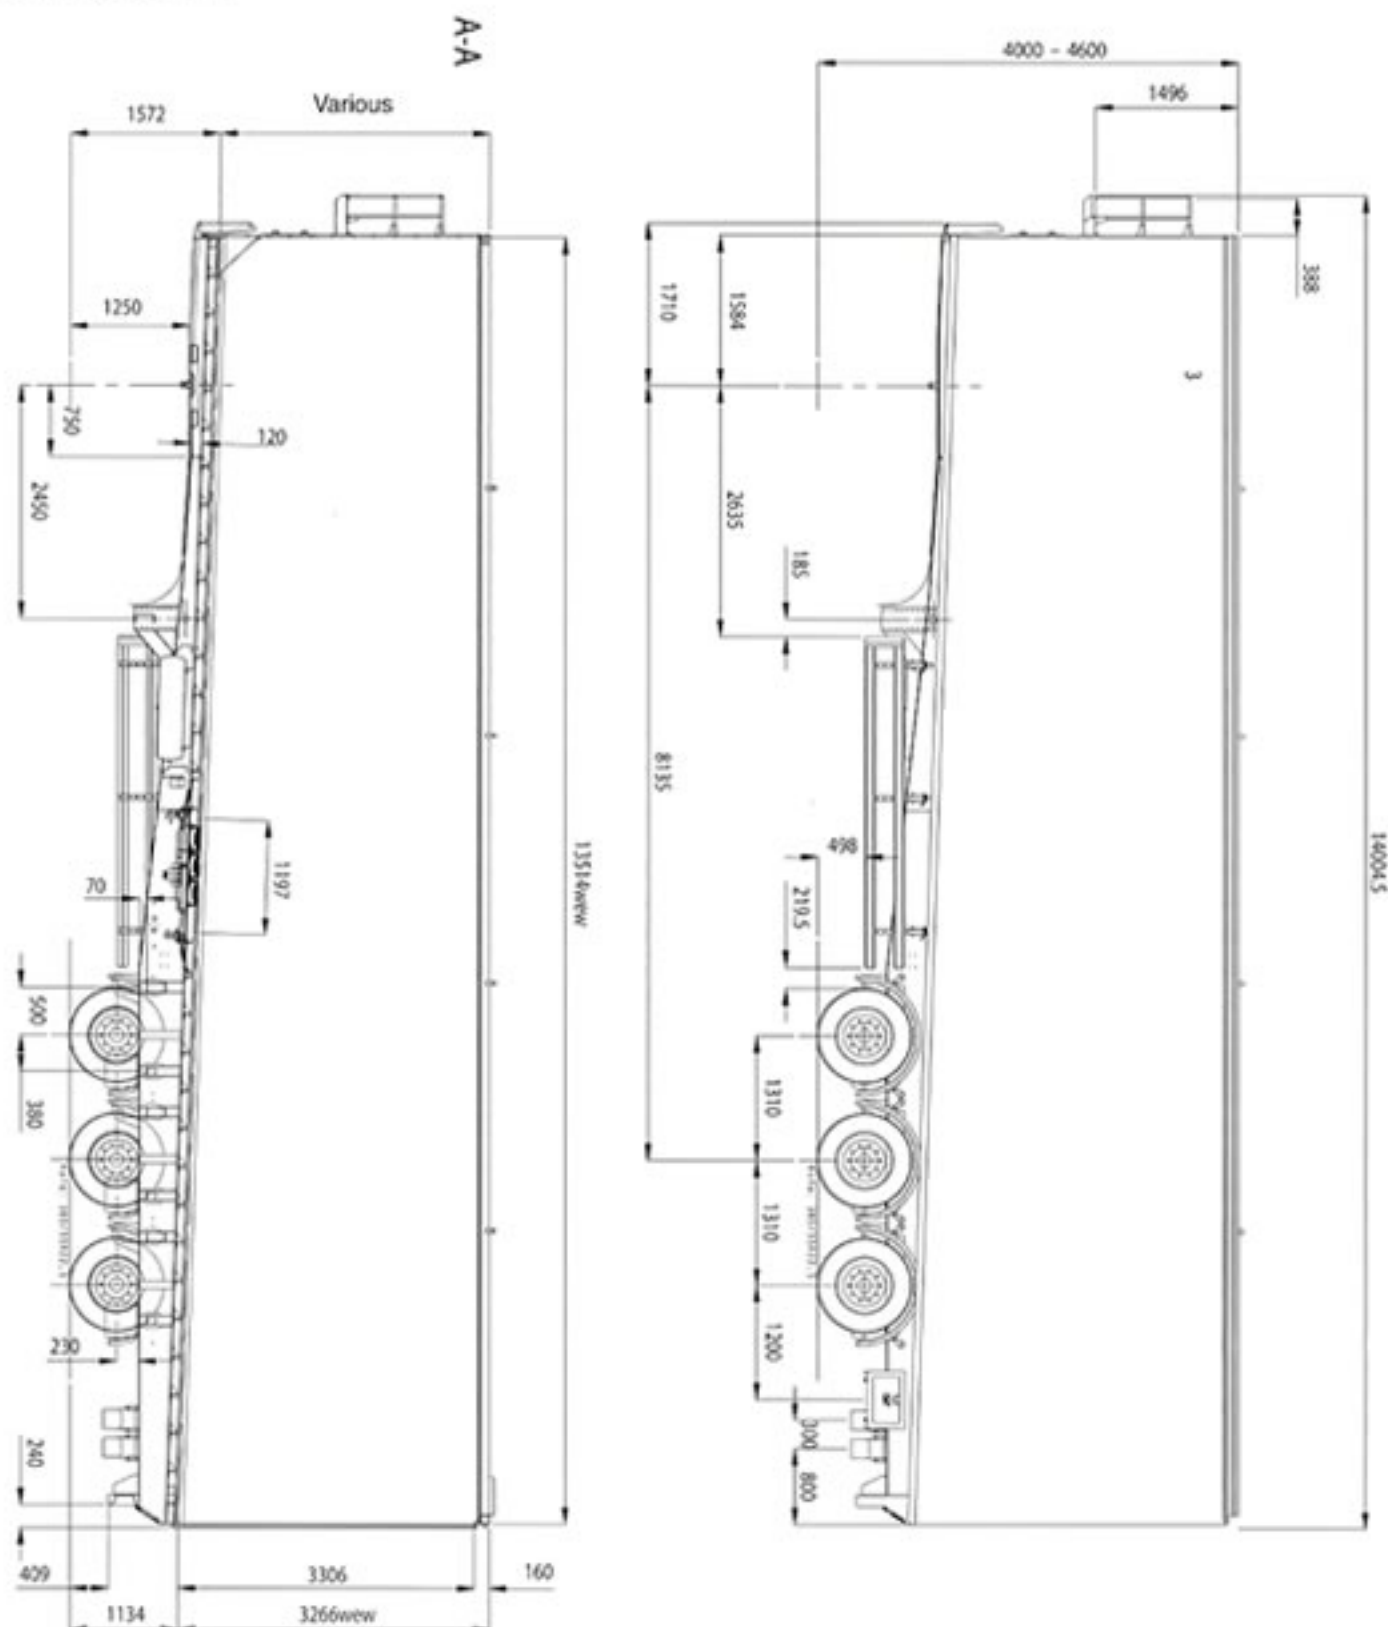

Your local supplier

**POLSKI**

Munro House  
Ringtail Court  
Burscough Industrial Estate  
Burscough  
Lancashire L40 8JB  
Phone Line 01704 897003  
Fax Line 01704 896051

